


MODEL YK32

FULL PORT
#150 & #300
8"

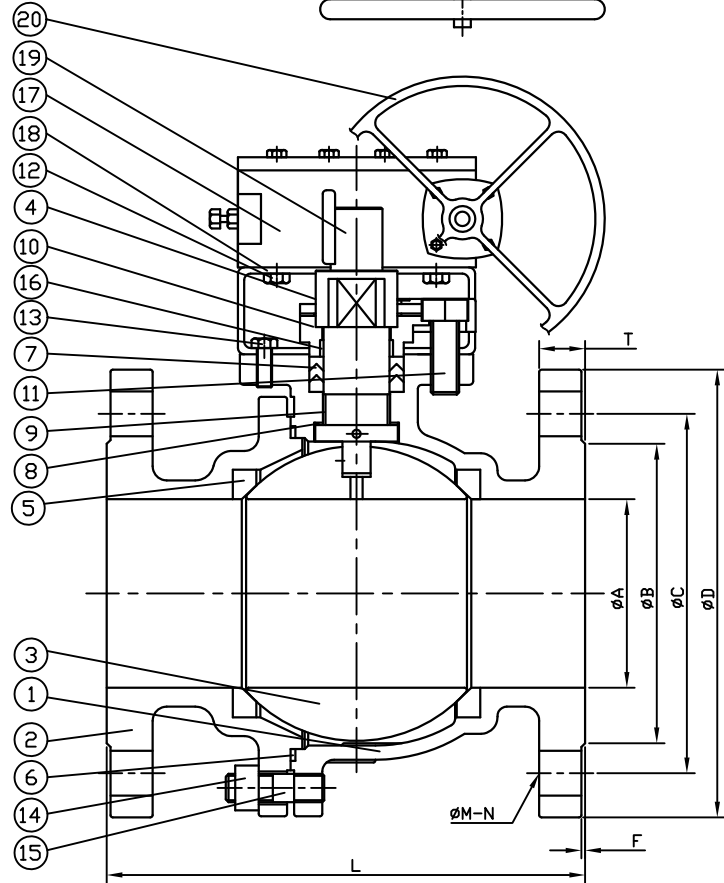

MATERIAL LIST

NO.	PART NAME	SPECIFICATION
1	BODY	A351 CF8M/A216 WCB
2	CAP	A351 CF8M/A216 WCB
3	BALL	ASTM A351 CF8M
4	STEM	S.S316
5	SEAT	PTFE+15%EKONDOL
6	GASKET	PTFE+15%EKONDOL
7	STEM PACKING	PTFE
8	THRUST WASHER	PTFE.+15%G.F.
9	BEARING	PTFE.+15%G.F.
10	GLAND FLANGE	ASTM A351-CF8
11	GLAND BOLT	S.S.304
12	GEAR BOLT	S.S.41
13	YOKE BOLT	S.S.304
14	NUT	S.S.304
15	BOLT	S.S.304
16	GLAND BUSH	PTFE
17	GEAR BOX	CAST IRON
18	YOKE	CARBON STEEL
19	CONNECTOR	S.S.41
20	WHEEL	DUCTILE IRON

DIMENSIONS

Unit:Inch

SIZE	A	B	C	D	F	L	T	ØM-N
150LB	7.87	10.62	11.75	13.50	0.06	17.99	1.12	Ø0.88-8
300LB	7.87	10.62	13.00	15.00	0.06	19.76	1.62	Ø1.00-12

2PC FLANGE BALL VALVE ANSI #150 & #300LB 8"

DATE 2015/08/31

NO	DATE	DESCRIPTION	CONFIRM	CLASS	DIM.	0.5	3	6	30	120	315	MATERIAL	CF8M/WCB	DRAWN	
4				CLASS		3	6	30	120	315	1000	TREATMENT		CHECK	
3				CLASS 1		0.05	0.05	0.1	0.15	0.2	0.3	WEIGHT(Kg)		APPROVED	
2				CLASS 2		0.1	0.1	0.2	0.3	0.5	0.8	SCALE			
1				CLASS 3		0.15	0.2	0.5	0.8	1.2	2	DRAWING NO.	YK32-200A		J & M INTERNATIONAL LTD.