MODEL YK523

REDUCED BORE

1/4"–1" 2000WOG

11/4"–2" 1500WOG

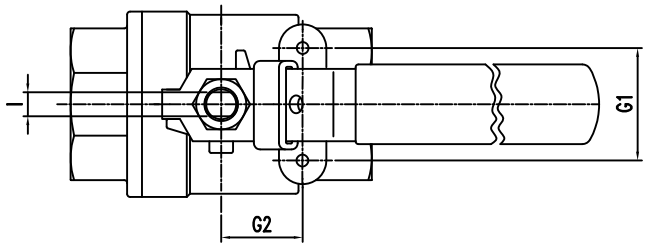

TEMPERATURE

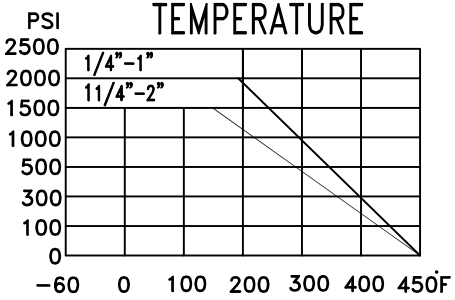

MATERIALS LIST

NO.	PART NAME	Q'TY	MATERIAL
1	BODY	1	ASTM A351 GR. CF8M
2	END CAP	1	ASTM A351 GR. CF8M
3	BALL	1	ASTM A351 GR. CF8M
4	STEM	1	SS 316
5	JOINT GASKET	1	PTFE
6	SEAT	2	TFM1600
7	THRUST WASHER	1	PTFE
8	STEM PACKING	1	PTFE
9	GLAND NUT	1	SS 304
10	STEM WASHER	1	SS 304
11	STEM NUT	1	SS 304
12	HANDLE	1	SS 304
13	HANDLE COVER	1	PLASTIC
	LOCKING DEVICE	1	SS 304

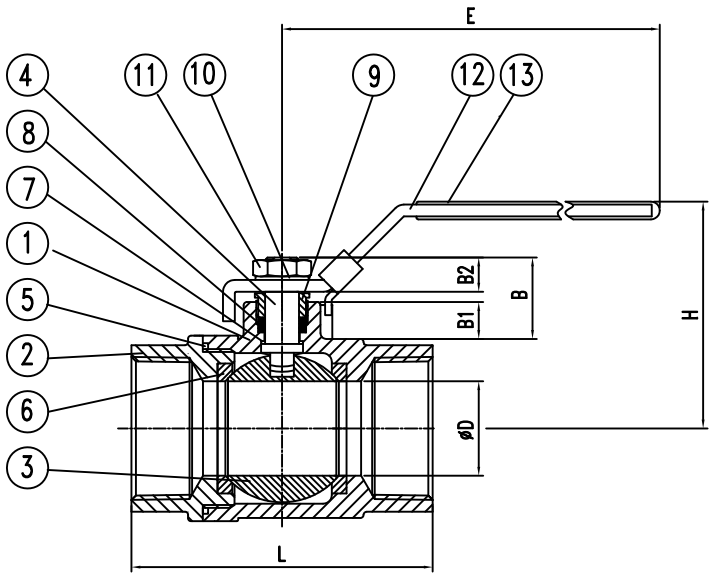

DIMENSIONS(INCH)

SIZE	B	B1	B2	ø D	E	H	I	L	G1	G2
1/4"	0.67	0.26	0.31	0.38	4.06	1.85	0.2	2.01	1.1	0.5
3/8"	0.67	0.26	0.31	0.38	4.06	1.85	0.2	2.01	1.1	0.5
1/2"	0.91	0.31	0.44	0.49	4.06	1.97	0.2	2.4	1.1	0.5
3/4"	0.98	0.4	0.43	0.59	5.24	2.28	0.25	2.68	1.38	0.88
1"	0.94	0.37	0.43	0.79	5.24	2.4	0.25	3.27	1.38	0.88
11/4"	1.2	0.45	0.59	0.98	6.02	2.72	0.31	3.54	1.5	1.0
11/2"	1.14	0.43	0.59	1.26	6.02	2.95	0.31	4.09	1.5	1.0
2"	1.28	0.45	0.61	1.5	7.48	3.27	0.37	4.61	1.5	1.0

修正 REVISION	日期 DATE	說明 DESCRIPTION

一般公差			
????	??±	??±	??±
0-4	0.05	0.1	0.3
4-16	0.07	0.2	0.5
16-65	0.1	0.3	0.7
65-250	0.2	0.5	1.2
250-1000	0.3	0.8	2

繪圖 DRAWD BY	設計 DESIGNED BY	比例尺 SCALE
PETER	PETER	
核對 CHECKED BY	核准 APPROVAL BY	日期 DATE 91-05-20

J&M INTERNATIONAL LTD

MODEL YK523

圖號 DRAWING NO. 205